

JLS2238US	24	4	AA	33	90	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	4: 4mm	27: 2700K 30: 3000K 40: 4000K	33: IP33 (Dry)	90: 90+	5m (SD) Customized



CCT	Power	Brightness	Luminous Efficacy
2700K	2.2 W/ft	193 lm/ft	88 lm/W
3000K	2.2 W/ft	203 lm/ft	92 lm/W
4000K	2.2 W/ft	214 lm/ft	97 lm/W

Project	
Qty	
Date	
Client	

Standard CCT




Waterproof Solution





IP33
No waterproof
Dry location

LED Type	SMD2216 white
Input Voltage	24VDC
Beam Angle	120°
CRI	90+
Power	7.2W/m (2.2W/ft)
Current	0.3A/m (0.09A/ft)
Brightness	193lm/ft (2700K); 203lm/ft (3000K); 214lm/ft (4000K)
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	29.4mm/unit (1.16in/unit)
Max. Length (No Voltage drop)	7m (23.0ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT	2700K/ 3000K/ 4000K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

DIMENSION

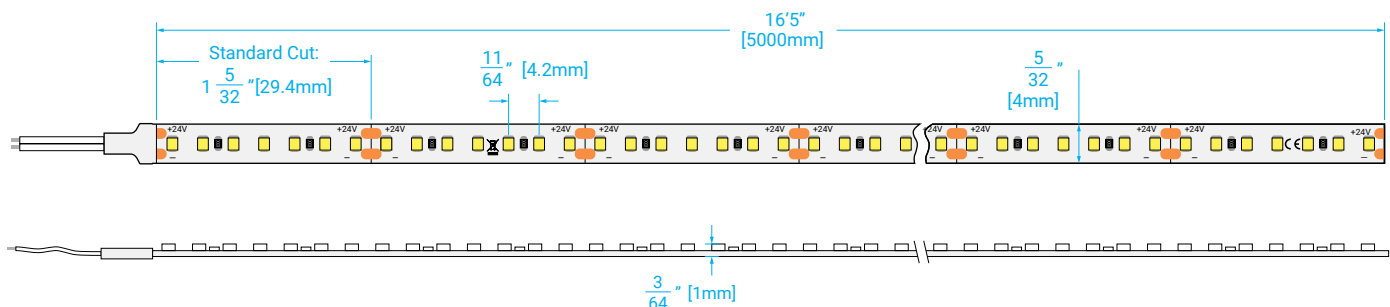

LUMINAIRE PHOTOMETRIC TEST REPORT

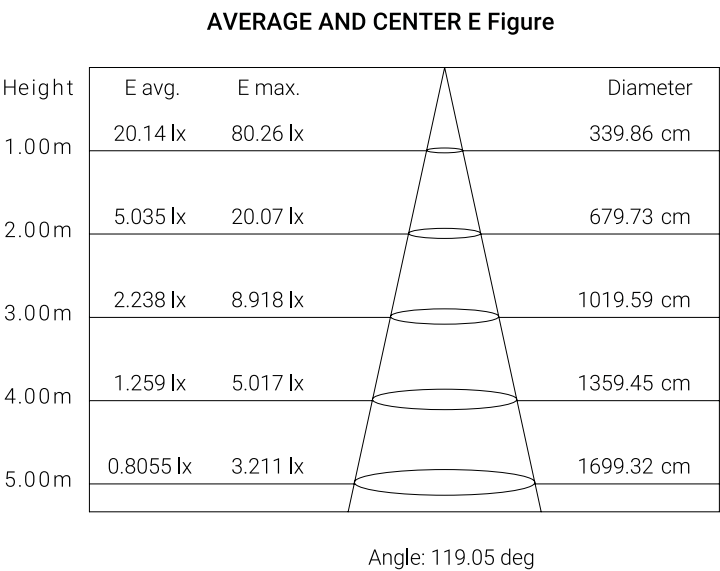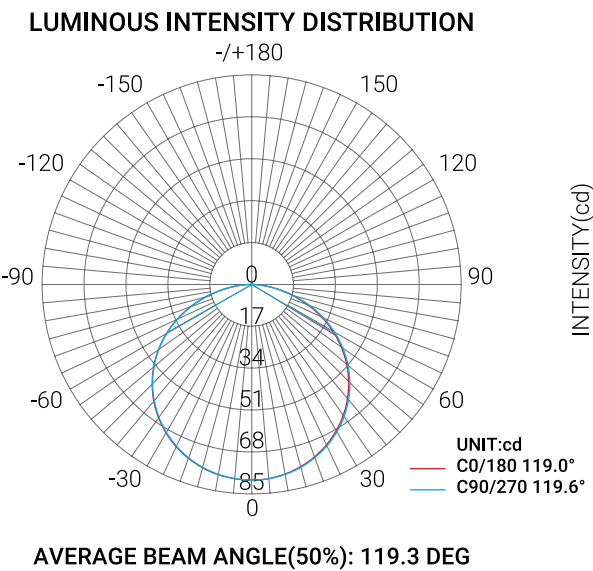

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.