

JLS4140SV	24	8	30	33	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	8: 8mm	30: 3000K	33: IP33 (Dry)	80: 80+	5m (SD) Customized



CCT	Power	Brightness	Luminous Efficacy	Project
3000K	4.39 W/ft	532 lm/ft	121 lm/W	
				Qty
				Date
				Client

Standard CCT



3000K

Waterproof Solution




IP33

No waterproof



Dry location

LED Type	SMD4020 white side-view
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	14.4W/M (4.39W/ft.)
Current	0.6A/m (0.18A/ft)
Brightness	532lm/ft
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	50mm/unit (1.97in/unit)
Max. Length (No Voltage drop)	3m (9.8ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT	3000K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

DIMENSION

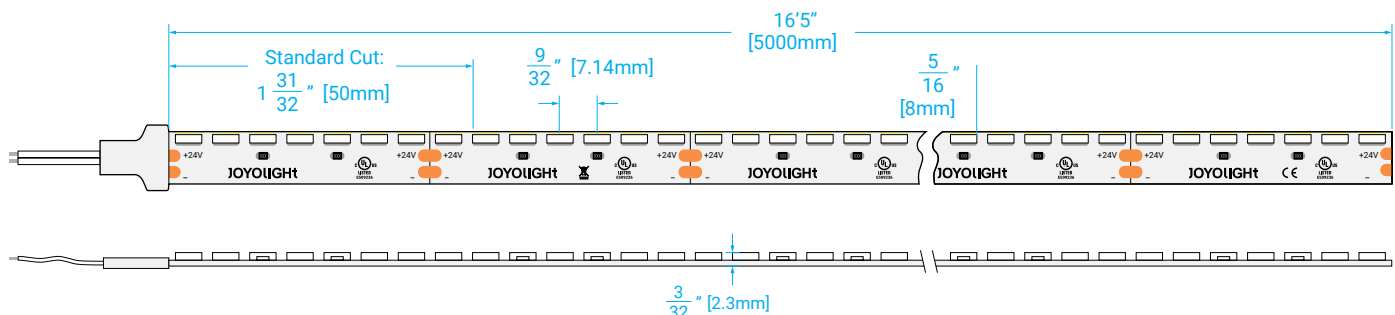

LUMINAIRE PHOTOMETRIC TEST REPORT

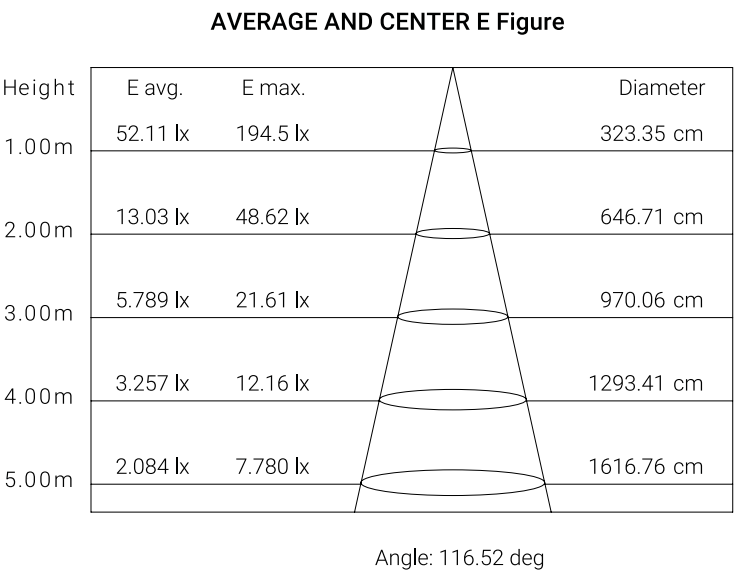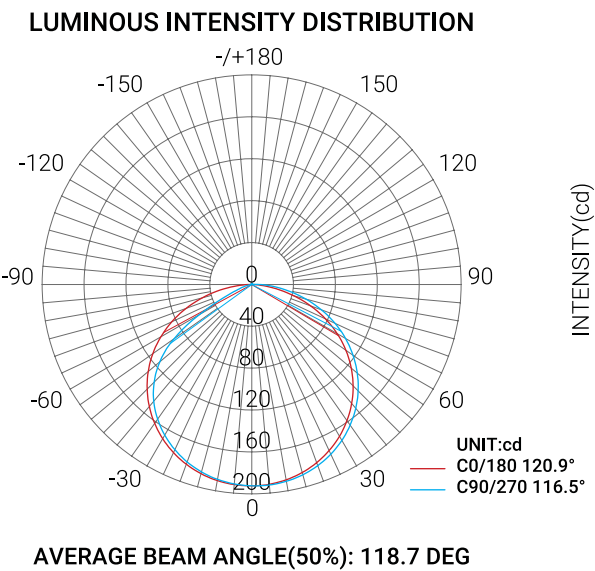

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.