

JLS860BD	24	6	30	33	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	6: 6mm	30: 3000K	33: IP33 (Dry)	80: 80+	5m (SD) Customized



CCT	Power	Brightness	Luminous Efficacy
3000K	2.2 W/ft	186 lm/ft	85 lm/W

Project	
Qty	
Date	
Client	

Standard CCT



3000K

LED Type	SMD2835 white
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	7.2W/m (2.2W/ft.)
Current	0.3A/m (0.09A/ft)
Brightness	186lm/ft
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	100mm/unit (3.94in/unit)
Max. Length (No Voltage drop)	7m (23.0ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT	3000K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

Waterproof Solution




IP33



No waterproof

Dry location

DIMENSION

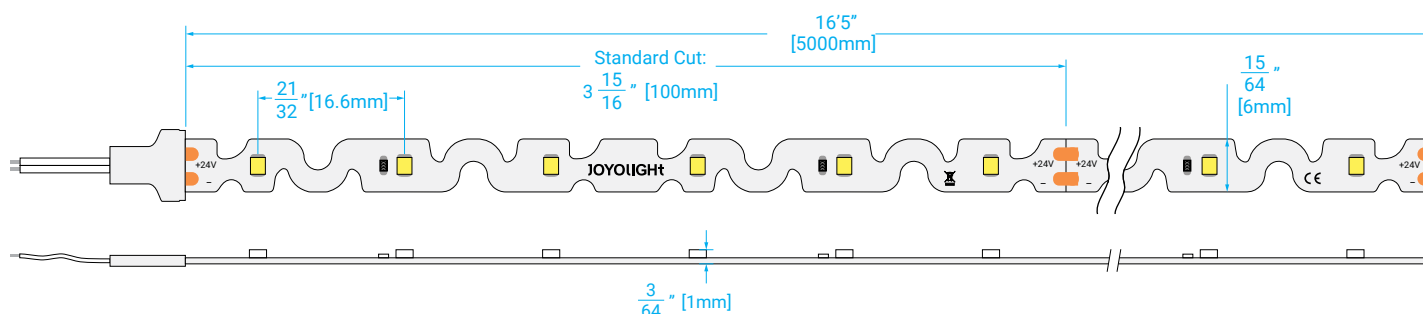

LUMINAIRE PHOTOMETRIC TEST REPORT

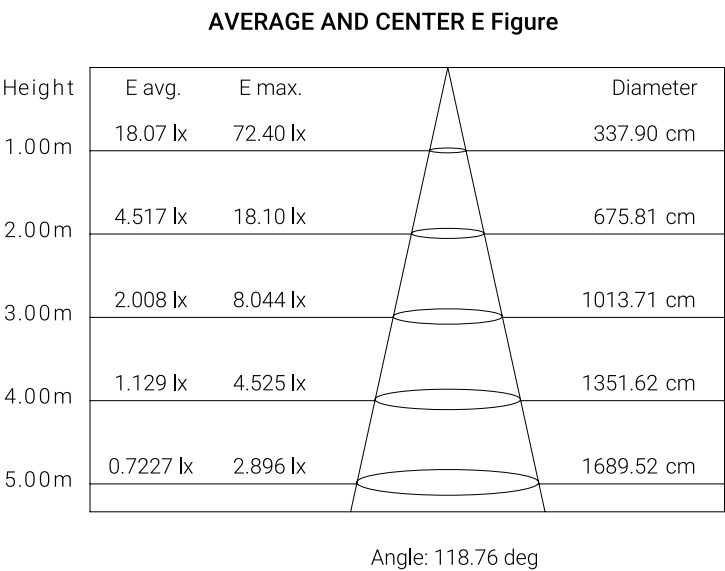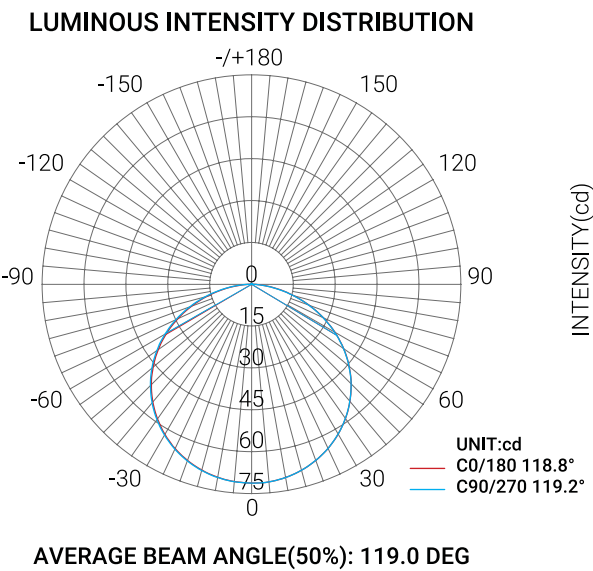

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.