

JLS8120SC	24	10	AA	BB	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	10: 10mm	27: 2700K 30: 3000K 40: 4000K	33: IP33 (Dry)	80: 80+	5m (SD) Customized




CCT	Power	Brightness	Luminous Efficacy
2700K	4.27 W/ft	406 lm/ft	95 lm/W
3000K	4.27 W/ft	384 lm/ft	90 lm/W
4000K	4.27 W/ft	427 lm/ft	100 lm/W

Project	
Qty	
Date	
Client	

Standard CCT




Waterproof Solution





LED Type	SMD2835 white
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	14W/m (4.27W/ft)
Current	0.58A/m (0.177A/ft)
Brightness	384lm/ft (2700K); 406lm/ft (3000K); 427lm/ft (4000K)
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	8.33mm/unit (0.33in/unit)
Max. Length (No Voltage drop)	7m (23.0ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT	2700K/ 3000K/ 4000K
Dimming Method	PWM (dimnable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

DIMENSION

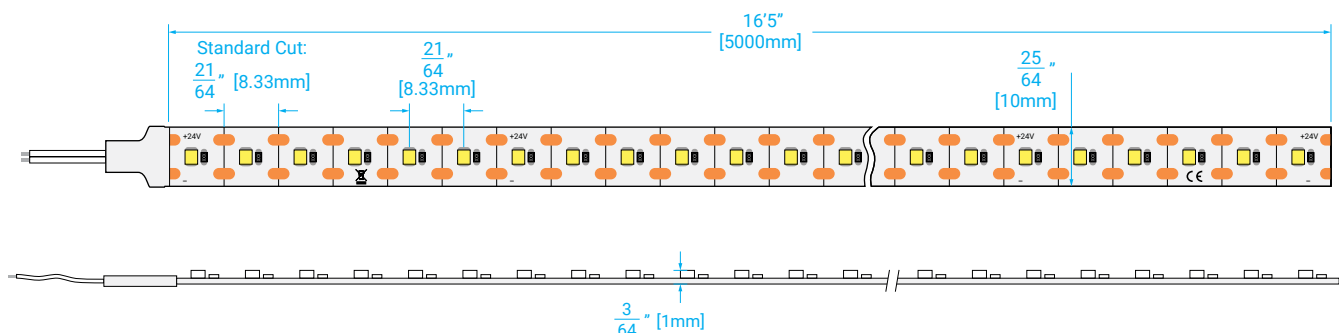

LUMINAIRE PHOTOMETRIC TEST REPORT

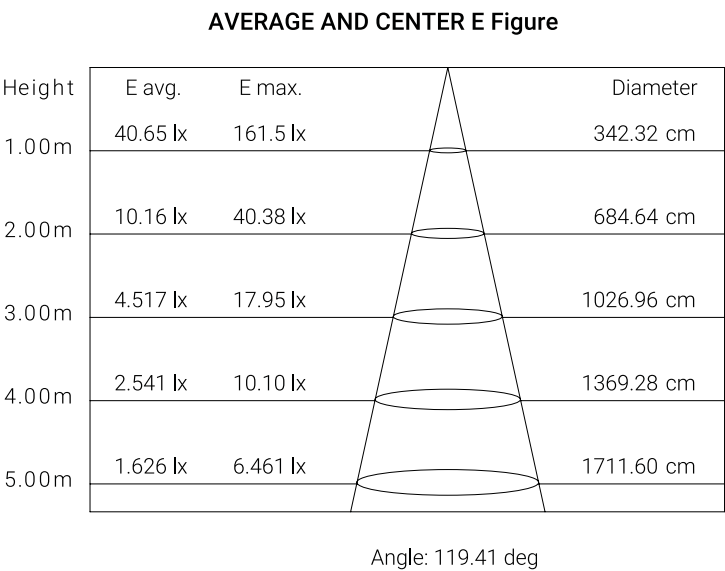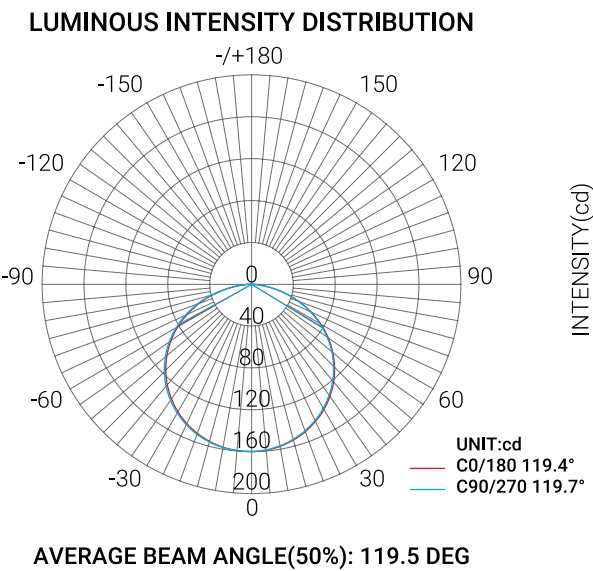

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.

ACCESSORIES

LC2P-10mm-IP33
Solderless 2-pin connector for 10mm IP33 LED strips to 20AWG stranded wire. (SMD LEDs ≤ 120 LEDs/m)

LL2P-10mm-IP33
Solderless 2-pin connector for two 10mm IP33 LED strips. (SMD LEDs ≤ 120 LEDs/m)