

JLS2300	24	10	30	33	90	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	10: 10mm	30: 3000K	33: IP33 (Dry)	90: 90+	5m (SD) Customized



CCT	Power	Brightness	Luminous Efficacy
3000K	3 W/ft	230 lm/ft	77 lm/W

Project	
Qty	
Date	
Client	

Standard CCT



3000K

LED Type	SMD2216 white
Input Voltage	24VDC
Beam Angle	120°
CRI	90+
Power	10W/m (3W/ft)
Current	0.42A/m (0.118A/ft)
Brightness	230lm/ft
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	20mm/unit (0.79in/unit)
Max. Length (No Voltage drop)	5m (16.4ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT	3000K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

Waterproof Solution




IP33



No waterproof

Dry location

DIMENSION

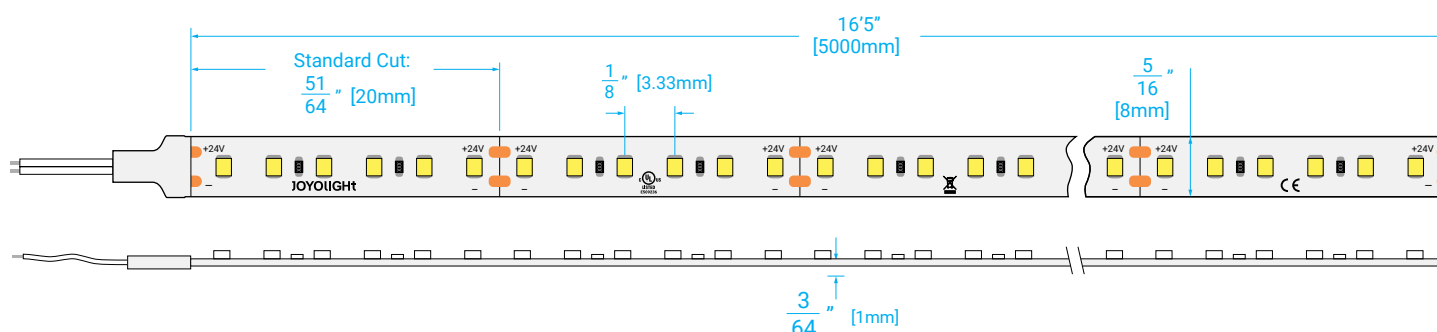

LUMINAIRE PHOTOMETRIC TEST REPORT

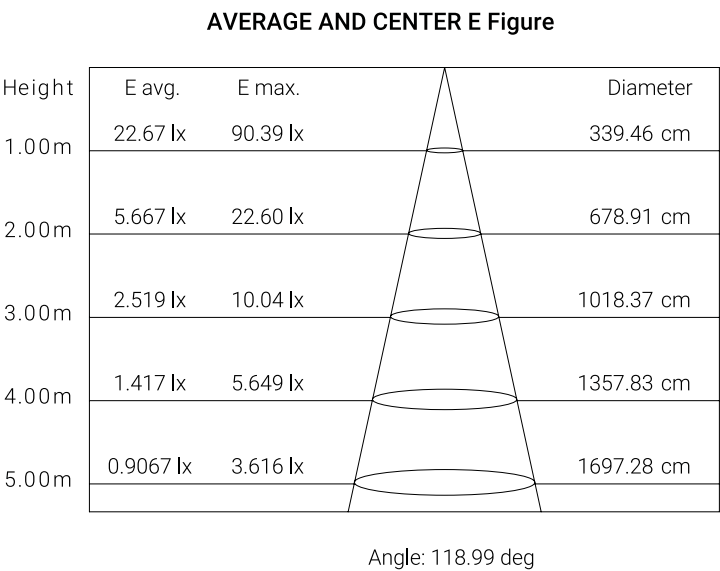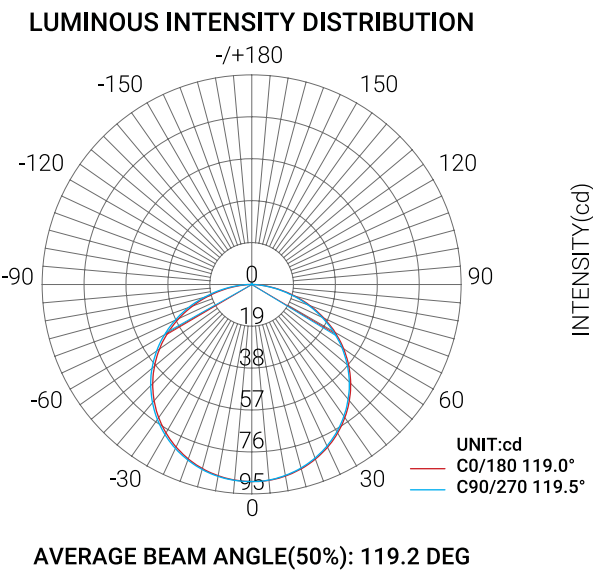

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.