

COB003	24	10	AA	55	90	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	10: 10mm	27*: 2700K* 30: 3000K 40*: 4000K*	55: IP55 (Damp)	90: 90+	5m (SD) 50m (MS) Customized




CCT	Power	Brightness	Luminous Efficacy
2700K*	3 W/ft	279 lm/ft	93 lm/W
3000K	3 W/ft	295 lm/ft	98 lm/W
4000K*	3 W/ft	310 lm/ft	100 lm/W

Project	
Qty	
Date	
Client	

* Please Contact us for NS - special order CCT.

Standard CCT



2700K* 3000K 4000K*

* Please Contact us for NS - special order CCT.

Waterproof Solution




IP55

Silicone Coating

Wet location

SMD	SMD2835 white
Input Voltage	24VDC
Beam Angle	140°/120°
CRI	90+
Power	10W/M (3W/ft.)
Current	0.42A/M(0.128A/FT)
Brightness	310lm/ft (@4000K)
Length/Reel	5m(16.4ft)
Cut Length	45.4mm/unit (1.79in/unit) 
Max. Length (No Voltage drop)	7m (23.0ft)
IP Grade	IP55
Operating Temperature	-20°C~45°C
LED CCT & Wavelength	2700K* / 3000K / 4000K* (* Please Contact us for NS - special order CCT)
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

DIMENSION


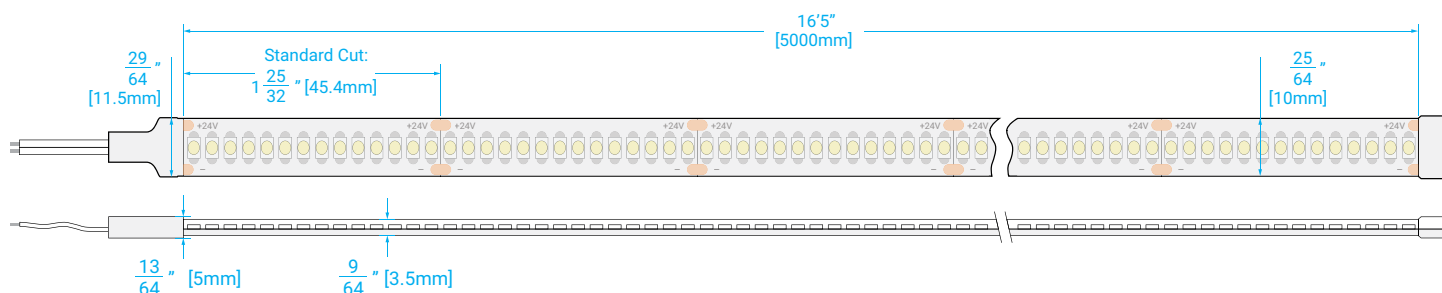


ACCESSORIES



LC2P-10mmH-IP33

Solderless 2-pin IP33 connector for 10mm LED strips to 20AWG stranded wire. (SMD LEDs ≥ 120 LEDs/m)



LL2P-10mmH-IP33

Solderless 2-pin IP33 connector for 10mm LED strips. (SMD LEDs ≥ 120 LEDs/m)

