

JLS3120	24	8	AA	BB	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	8: 8mm	27: 2700K 30: 3000K 40: 4000K	33: IP33 (Dry) 65: Nano (Damp)	80: 80+	5m (SD) 50m (MS) Customized




CCT	Power	Brightness	Luminous Efficacy
2700K	2.93 W/ft	243 lm/ft	83 lm/W
3000K	2.93 W/ft	255 lm/ft	87 lm/W
4000K	2.93 W/ft	267 lm/ft	91 lm/W

Project	
Qty	
Date	
Client	

Standard CCT




Waterproof Solution




LED Type	SMD3528 white
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	9.6W/M (2.93W/ft.)
Current	0.4A/m (0.12A/ft)
Brightness	243lm/ft (2700K); 255lm/ft(3000K); 267lm/ft (4000K)
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	50mm/unit (1.97in/unit)
Max. Length (No Voltage drop)	7m (23.0ft)
IP Grade	IP33/ IP65
Operating Temperature	-20°C~45°C
Environment Humidity	40-70% RH
LED CCT	2700K/ 3000K/ 4000K
Dimming Method	0-10V, RX, PWM, Triac, RF, Bluetooth, WIFI etc.
Certification	UL, CE, RoHS

DIMENSION

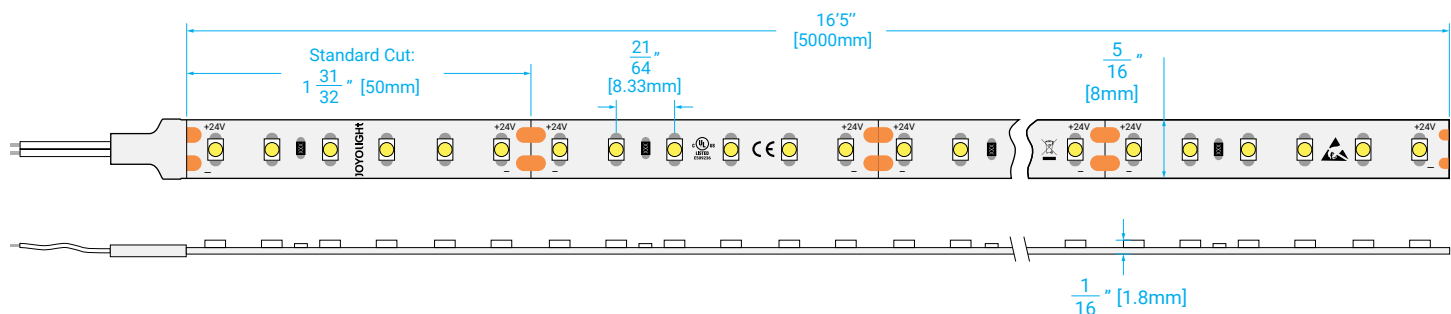

LUMINAIRE PHOTOMETRIC TEST REPORT

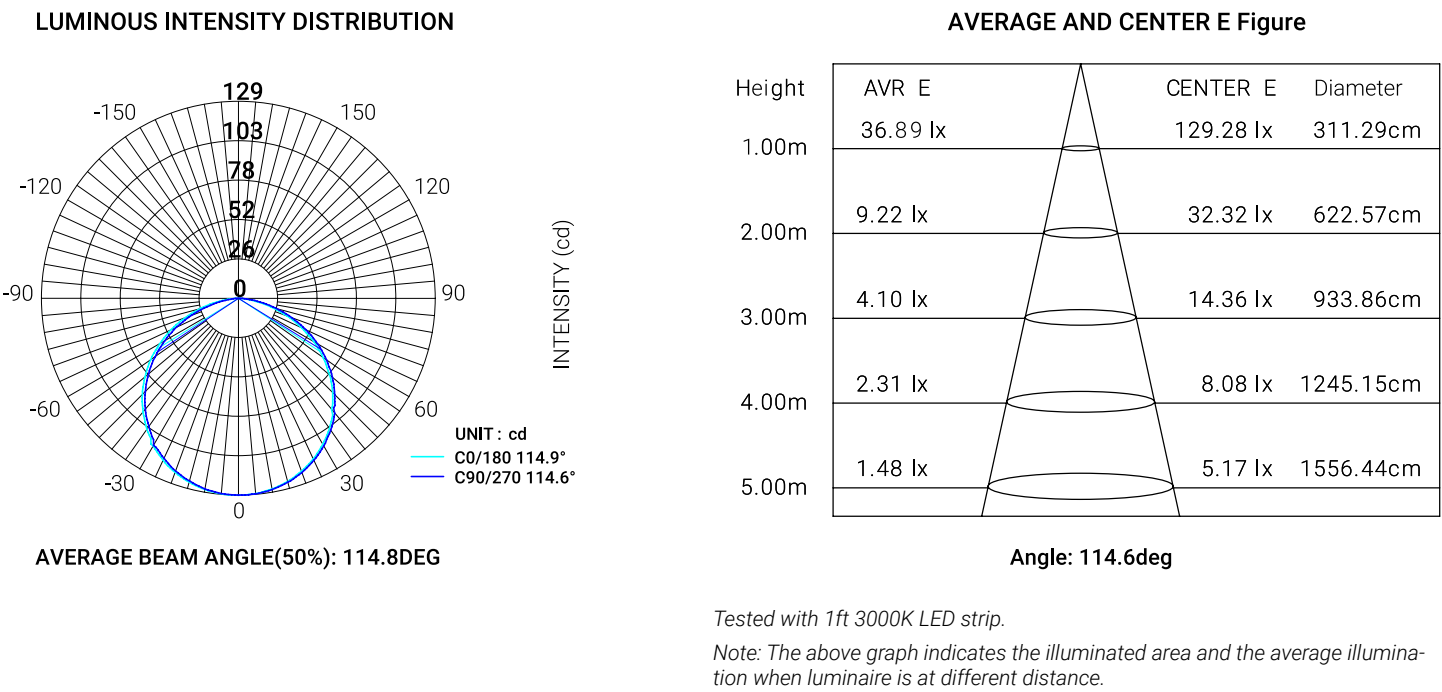

ACCESSORIES

TC-LC03
Solderless 2-pin connector for 8mm ip33 LED strip to 24-14 AWG stranded / solid wire.

4.5 11.5 8.5 6.4 11.5 6.4 13.3 13.3

TC-LC02
Solderless 2-pin connector for 8mm IP33 LED strips to 24-14 AWG stranded / solid wire.

11.3mm 10.2mm 7.9mm 4.6mm 8.3mm