


NE201	24	16	AA	65	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	16: 16mm	2700K 3000K 3500K 4000K 5000K 6500K	65: IP65 (Damp)	80: 80+	50m Customized



Color	Power	Brightness	Luminous Efficacy
2700K	4.27 W/ft	244 lm/ft	57 lm/W
3000K	4.27 W/ft	256 lm/ft	60 lm/W
3500K	4.27 W/ft	264 lm/ft	62 lm/W
4000K	4.27 W/ft	264 lm/ft	62 lm/W
5000K	4.27 W/ft	268 lm/ft	63 lm/W
6500K	4.27 W/ft	268 lm/ft	63 lm/W

Project	
Qty	
Date	
Client	

Standard CCT

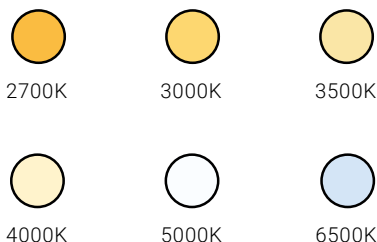

Style	Top-Bend (White)
Dimension	W16 x H15mm (W0.62 x H0.6in)
Input Voltage	24VDC
Beam Angle	120°/180°
CRI	80+
Power	14W/m (4.27W/ft)
Max. Length (No Voltage drop)	5m (16.4ft)
Cut Length	50mm/unit (1.97in/unit)
Minimum bending diameter	200mm (7.87in)
Minimum twist degree	6°/50mm (1.97in)
IP Grade	IP65
Operating Temperature	-20°C~45°C
Lifespan	50,000h (indoor), 5 year warranty; 36,000h (outdoor), 3 year warranty
LED CCT & Wavelength	2700K; 3000K; 3500K; 4000K; 5000K; 6500K
Dimming Method	PWM (dimnable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, TUV-CE, RoHS

Waterproof Solution




IP65

Waterproof

Damp location


DIMENSION

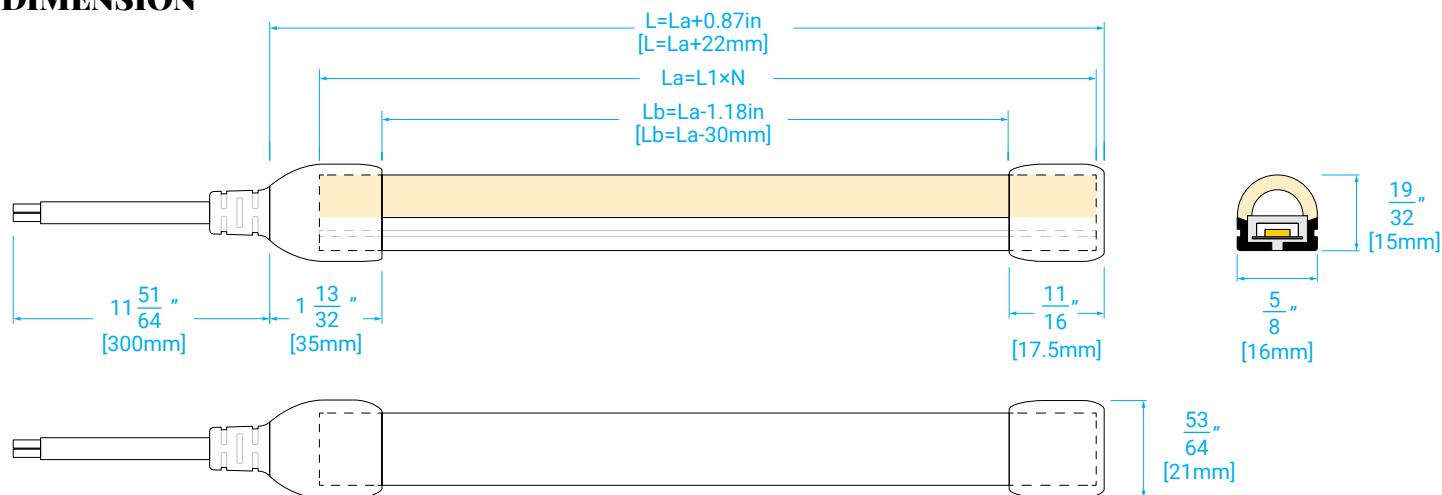

* L: Total length; La: LED strip length; Lb: Illumination surface length; L1: Minimum cutting unit; N: 1, 2, 3...

* The wiring kit in the diagram above is rear power cable, side and bottom power cable are also available.

ACCESSORIES

 NE201-BR Bottom mounting brackets for flexible LED neon strip light NE201.	 NE201-RC Rigid Aluminum channel for flexible LED neon strip light NE201.	 NE201-MC Top mounting clips for flexible LED neon strip light NE201.	 NE201-FC Flexible Aluminum channel for top bend LED neon strip light NE201.	 NE201-WK Power cable wiring kit for LED neon strip light NE201. [Rear/Side/Bottom] NE201-WK-RR  NE201-WK-SD  NE201-WK-BT 
---	---	---	---	---