


NE510	24	4	AA	55	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	4: 4mm	2700K 3000K 3500K 4000K 5000K 6500K	55: IP55 (Damp)	80: 80+	5m Customized



Color	Power	Brightness	Luminous Efficacy
2700K	2.74 W/ft	55 lm/ft	20 lm/W
3000K	2.74 W/ft	58 lm/ft	21 lm/W
3500K	2.74 W/ft	58 lm/ft	21 lm/W
4000K	2.74 W/ft	61 lm/ft	22 lm/W
5000K	2.74 W/ft	61 lm/ft	22 lm/W
6500K	2.74 W/ft	61 lm/ft	22 lm/W

Project	
Qty	
Date	
Client	

Standard CCT

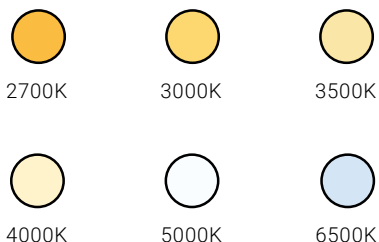

Style	Side-Bend (White)
Dimension	W4 x H8.5mm (W0.16 x H0.33in)
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	9W/m (2.74W/ft)
Max. Length (No Voltage drop)	5m (16.4ft)
Cut Length	Free cut to any length
Minimum bending diameter	30mm (1.18in)
Minimum twist degree	360°/300mm (11.8in)
IP Grade	IP55
Operating Temperature	-20°C~45°C
Lifespan	50,000h (indoor), 5 year warranty
LED CCT & Wavelength	2700K; 3000K; 3500K; 4000K; 5000K; 6500K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, TUV-CE, RoHS

Waterproof Solution




IP55

Silicone Coating

Damp location

DIMENSION

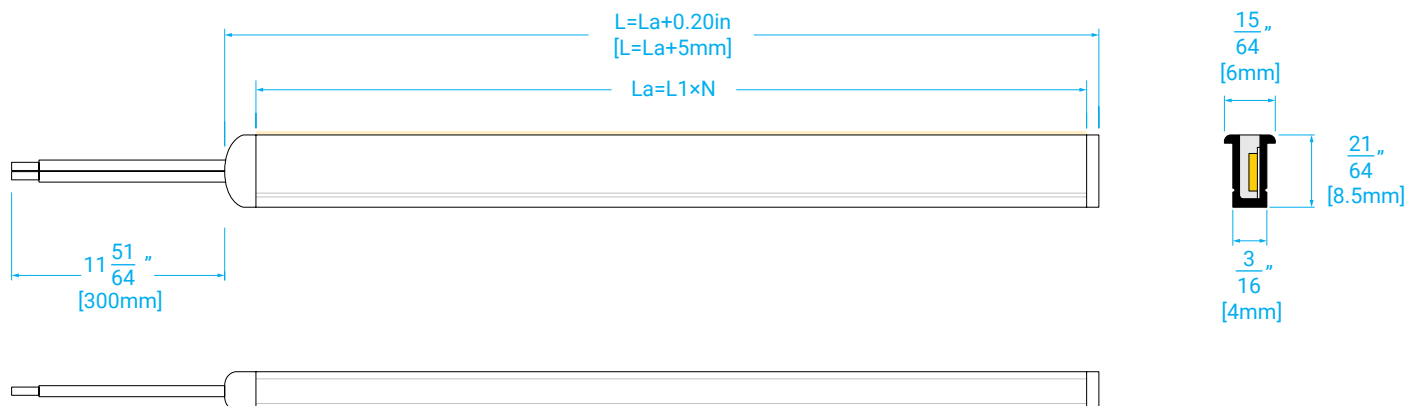

* L : Total length; La : LED strip length; $L1$: Minimum cutting unit; N : 1, 2, 3...

* The wiring kit in the diagram above is rear power cable, side and bottom power cable are also available.