




φ25mm

**Features:**

1. Silicone extrusion+flexible FPC+highlight LED
2. UV resistance
3. Flexible
4. Mild and even light output
5. High waterproof grade
6. Cuttable+Non-soldering terminal
7. Hollow inside, protect LEDs well
8. Not be restricted by cutting unit, could cut it at any length without dark zone
9. Emitting 360°, widely use for artistic lighting space to bring more vivid designs
10. Certification: 
11. Warranty: 3 years
12. Dimming: Dimmable (see driver options)

Order Code:

White					
	DN25	Tape	CCT	Diver	Installation
		5.85W/ft	2700K 3000K 4000K	Dimmable Non-Dimmable	A: Remote B: Canopy


Project:

Qty:


Date:

Client:

Notes:

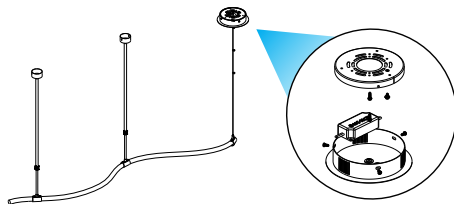Installation:

A suspension installation with surface mounted driver (with canopy)



B Surface mount with remote drivers

Accessories: Select what you need

DN25-001

2-4ft suspension bar, 1pc




DN25-002

6 ft suspension wire with canopy, 1pc



DN25-003


6 ft Suspension wire, 1pcs



DN25-004


Surface mount bracket, 1pcs

Size and structure:



Recommended Accessories for 1-15 ft:
DN25-001: 2 PCS
DN25-002: 1 PCS

Theoretical Length ft	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Actual length	0.93	1.92	2.90	3.88	4.87	6.02	7.00	7.98	8.97	9.95	10.94	11.92	12.91	13.89	14.87


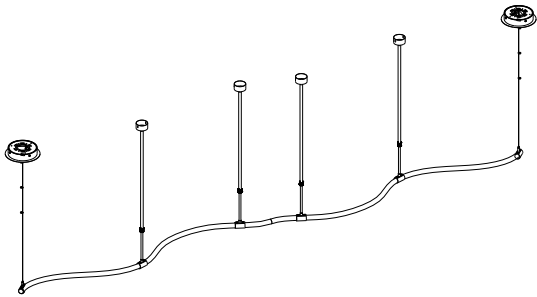


Recommended Accessories for 16-30 ft:
DN25-001: 4 PCS
DN25-002: 2 PCS

Theoretical Length ft	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Actual length	15.86	16.84	17.99	18.97	19.96	20.94	21.93	22.91	23.90	24.88	25.86	26.85	28.00	28.98	29.97

Product specifications:

Tape type		5.85W/ft
Tape(name & width)		JLS8140-10mm
Power(W/ft)		5.85
Voltage(V)		DC24V
CRI		80+
Prower Brightness	2700K	516
	3000K	555
	4000K	585

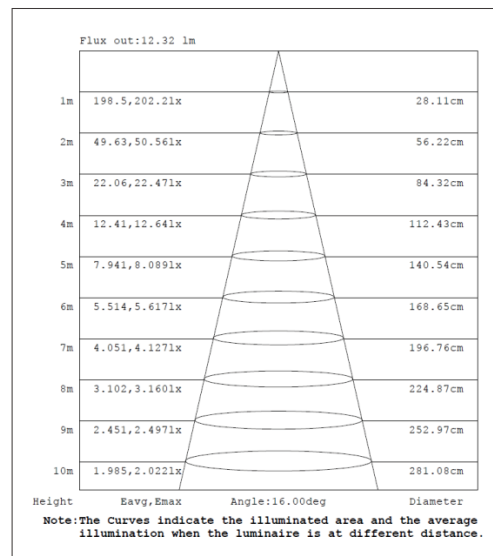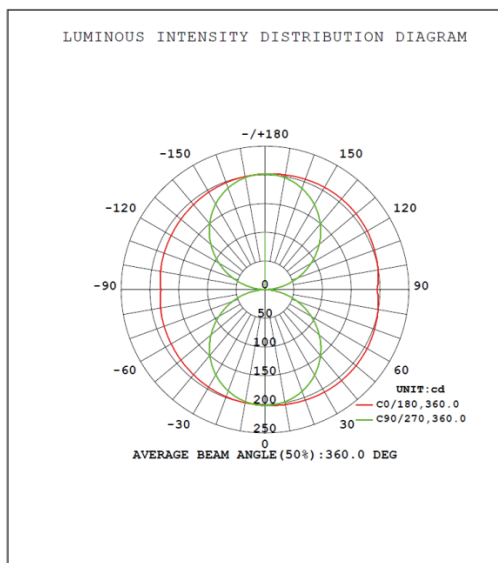Luminous intensity distribution:

Drawing Grid

