

JLS8120F	24	8	30	BB	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	8: 8mm	30: 3000K	33: IP33 (Dry) 55: IP55 (Damp) 65: Nano (Damp) 67: IP67 (Wet)	80: 80+	5m (SD) 50m (MS) Customized



CCT	Power	Brightness	Luminous Efficacy
3000K	5 W/ft	504 lm/ft	101 lm/W

Project	
Qty	
Date	
Client	

Standard CCT



3000K

Waterproof Solution

**IP33**

No waterproof

Dry location

**IP55**

Silicone Coating

Damp location

**IP65**

Waterproof

Damp location


**IP67**

Silicone Extrusion

Wet location
Short time under water

LED Type	SMD2835 white
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	16.4W/m (5W/ft)
Current	0.68A/m (0.208A/ft)
Brightness	504lm/ft (3000K)
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	50mm/unit (1.97in/unit)
Max. Length (No Voltage drop)	5m (16.4ft)
IP Grade	IP33/ IP55/ IP65/ IP67
Operating Temperature	-20°C~45°C
Environment Humidity	40-70% RH
LED CCT	3000K
Dimming Method	0-10V, RX, PWM, Triac, RF, Bluetooth, WIFI etc.
Certification	UL, CE, RoHS

DIMENSION

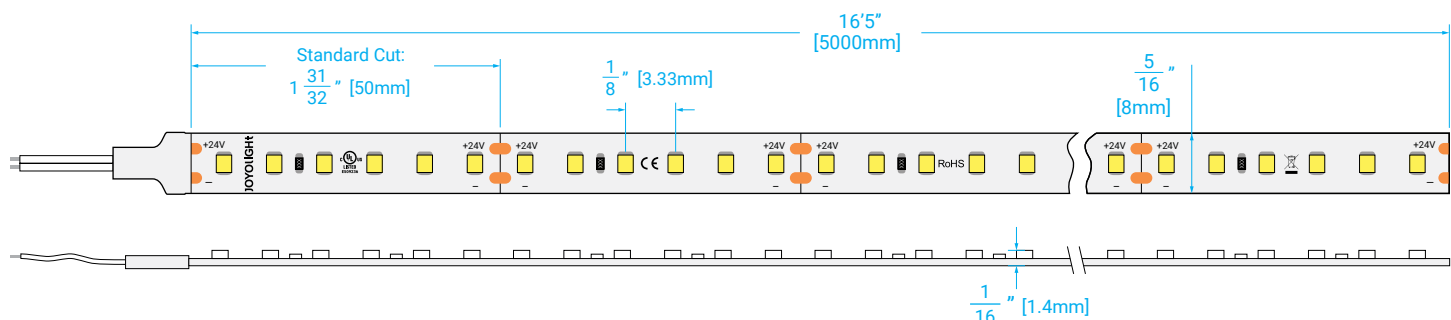

ACCESSORIES

