




Standard CCT



2300K

Narrow Spectrum

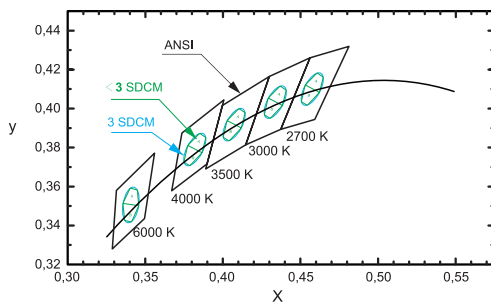

Impressive color consistency within 3 Step MacAdam in the center BIN on the Planck Locus over each individual LED, One Bin Only

Various Waterproof Solution



IP33

No waterproof

Dry location

BV Standard Product

Help to set up an energy conservation, flexible and multifunctional home lighting, the product with the features of low power, high brightness, high light efficiency, high CRI and high waterproof, various of connection accessories and dimming control systems are optional.


Features

- Highlight SMD2835 + flexible FPC
- CRI80+/90+
- High brightness 1605lm/m (489lm/ft)
- Precise cutting 50mm/unit (0.164ft/unit)
- Waterproof: IP33
- Working time≥50000H
- Suitable for various dimming controllers

Parameter

Input Voltage	24V DC
Beam Angle	120°
CCT	2300K
CRI	80+/90+
Power	14.4W/m (4.4W/ft)
Current	0.6A/m (0.183A/ft)
Brightness	1605lm/m (489lm/ft)
Length / Reel	5m (16.4ft)
Cut Length	50mm/unit (0.164ft/unit)
IP Grade	IP33
Operating Temperature	-20°C~+45°C
Storage Temperature	0°C~+60°C
Environment Humidity	40-70% RH

Test Report

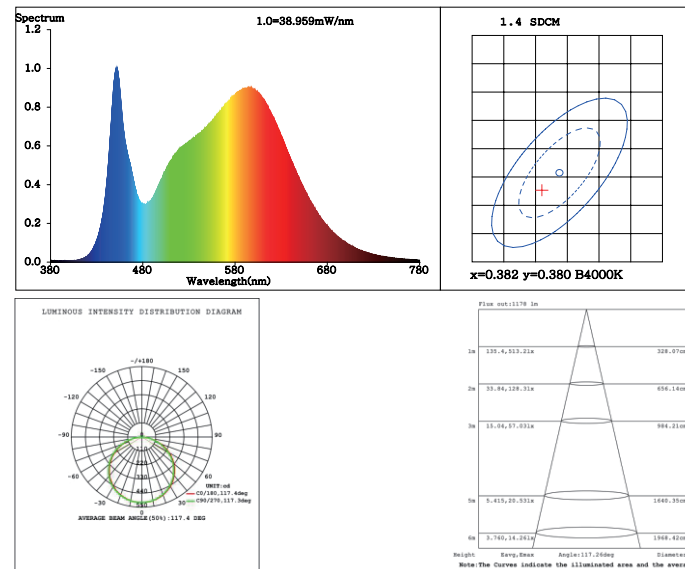

Dimension

