

JLS8160	24	8	30	BB	90	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	8: 8mm	30: 3000K	33: IP33 (Dry) 65: IP65 (Damp)	90: 90+	5m (SD) 50m (MS) Customized



CCT	Power	Brightness	Luminous Efficacy
3000K	4.4 W/ft	704 lm/ft	160 lm/W

Project	
Qty	
Date	
Client	

Standard CCT




3000K

LED Type	SMD2835 white
Input Voltage	24VDC
Beam Angle	120°
CRI	90+
Power	14.4W/m (4.4W/ft)
Current	0.54A/m (0.16A/ft)
Brightness	704lm/ft
Length/ Reel	5m(16.4ft)/ 50m/(164ft)
Cut Length	50mm/unit (1.97in/unit)
Max. Length (No Voltage drop)	5m (16.4ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT	3000K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS



Waterproof Solution

IP33 No waterproof	IP65 Waterproof
Dry location	Damp location

DIMENSION

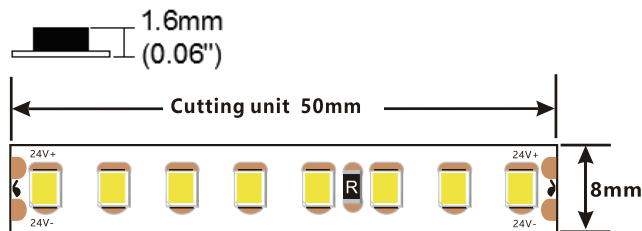

LUMINAIRE PHOTOMETRIC TEST REPORT

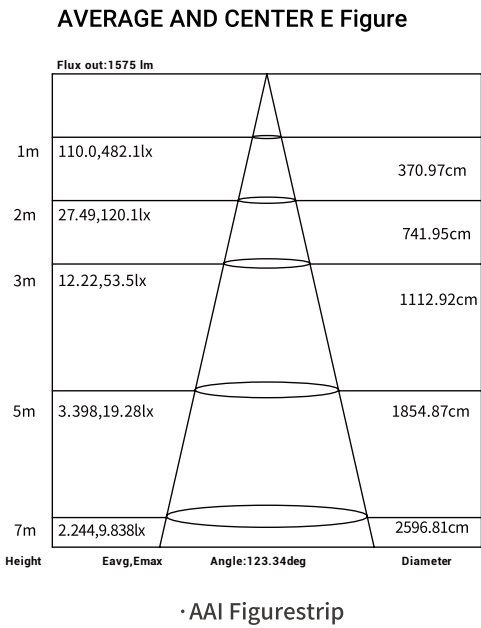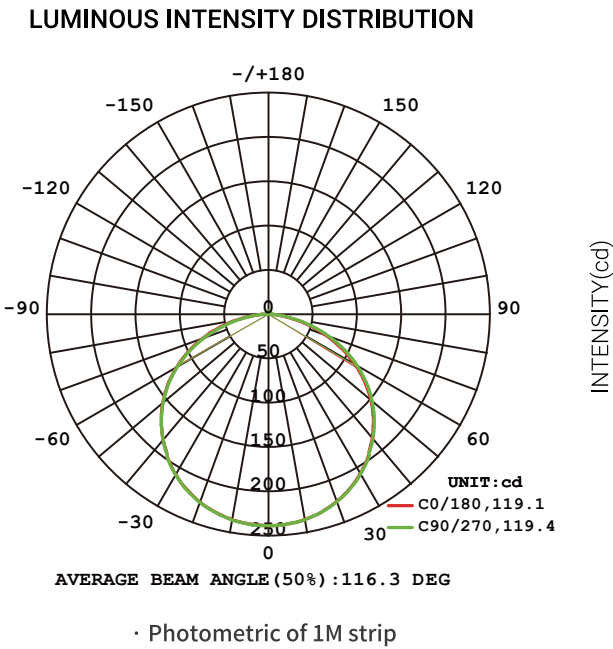

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.

ACCESSORIES

