





Standard CCT




Narrow Spectrum

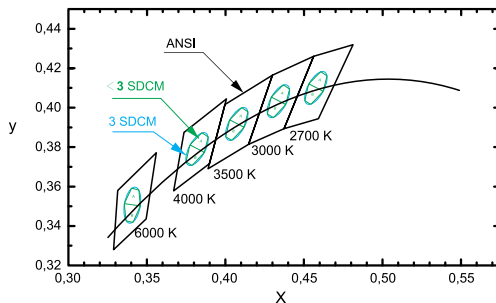

Impressive color consistency within 3 Step MacAdam in the center BIN on the Planck Locus over each individual LED, One Bin Only

Various Waterproof Solution

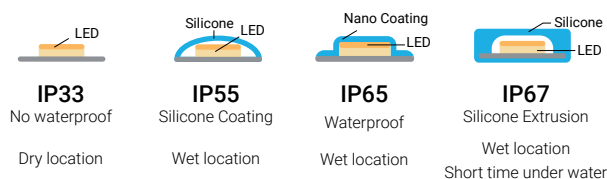

Standard Product

Help to set up an energy conservation, flexible and multifunctional home lighting, the product with the features of low power, high brightness, high light efficiency, high CRI and high waterproof, various of connection accessories and dimming control systems are optional.


Features

- Highlight SMD2835 + flexible FPC
- CRI80+/90+
- High brightness 2350~2750lm/m (716~838lm/ft)
- Light efficiency up to 135lm/W
- Precise cutting 71.4mm/unit (0.234ft/unit)
- Waterproof: IP33-IP67
- Working time ≥ 50000H
- Suitable for various dimming controllers


Parameter

Input Voltage	24V DC
Beam Angle	120°
CCT	2700K/3000K/4000K/6000K
CRI	80+ / 90+
Power	20.2W/m (6.16W/ft)
Current	0.842A/m (0.257A/ft)
Brightness	2350-2750lm/m (716-838lm/ft)
Length / Reel	5m (16.4ft)
Cut Length	71.4mm/unit (0.234ft/unit)
IP Grade	IP33/IP55/IP67
Operating Temperature	-20°C~+45°C
Storage Temperature	0°C~+60°C
Environment Humidity	40-70% RH

Test Report

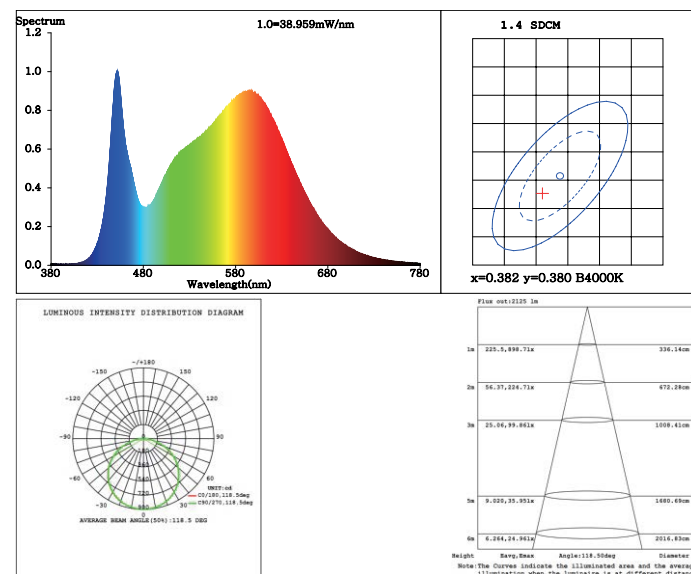

Dimension

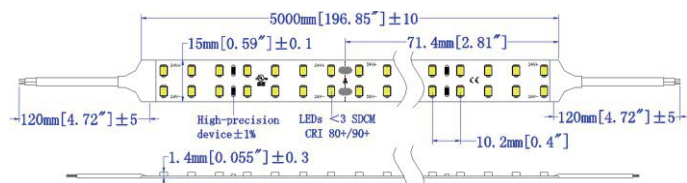

Parameters above allow 10% floating

**2700K**

20.2W/m (6.16W/ft)
2397lm/m (731lm/ft)

3000K

20.2W/m (6.16W/ft)
2570lm/m (783lm/ft)

4000K

20.2W/m (6.16W/ft)
2725lm/m (831lm/ft)

6000K

20.2W/m (6.16W/ft)
2656lm/m (810lm/ft)

Optional Accessories**CC3P**


Cable extension connector;
T connector
Extension connector for one pin cable
Easy installation

**CC4P**


Cable extension connector
Extension connector for two pin cable
Easy installation

**CC6P**


Cable extension connector;
T connector
Extension connector for two pin cable
Easy installation

Triac Dimming

Wireless dimmer




Triac driver




UL junction box



LED flexible strip

0-10V Dimming

Dimmer



High power 3-in-1 dimming driver
(300W、320W、360W)



3-in-1 dimming driver (0-10V/RX/PWM)
(25W、65W、100W)



LED flexible strip

Non-Dimmable

Power Supply
110V



Non-Dimmable Dimmer



LED flexible strip