





Standard CCT



Narrow Spectrum

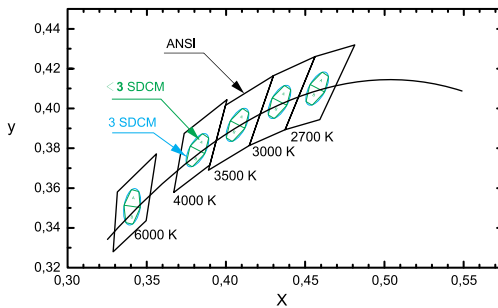

Impressive color consistency within 3 Step MacAdam in the center BIN on the Planck Locus over each individual LED, One Bin Only.

Various Waterproof Solution



IP33

No waterproof

Dry location

Standard Product

Help to set up an energy conservation, flexible and multifunctional home lighting, the product with the features of low power, high brightness, high light efficiency, high CRI and high waterproof, various of connection accessories and dimming control systems are optional.


Features

- Highlight SMD2835 + flexible FPC
- CRI80+/90+
- High brightness 2880~3330lm/m (878~1015lm/ft)
- Light efficiency up to 135lm/W
- Precise cutting 50mm/unit (0.164ft/unit)
- Waterproof: IP33
- Working time≥50000H
- Suitable for various dimming controllers


Parameter

Input Voltage	24V DC
Beam Angle	120°
CCT	2700K/3000K/4000K/6000K
CRI	80+ / 90+
Power	25W/m (7.6W/ft)
Current	1.04A/m (0.318A/ft)
Brightness	2880-3330lm/m (878-1015lm/ft)
Length / Reel	2.5m (8.2ft)
Cut Length	50mm/unit (0.164ft/unit)
IP Grade	IP33
Operating Temperature	-20°C~+45°C
Storage Temperature	0°C~+60°C
Environment Humidity	40-70% RH


Test Report

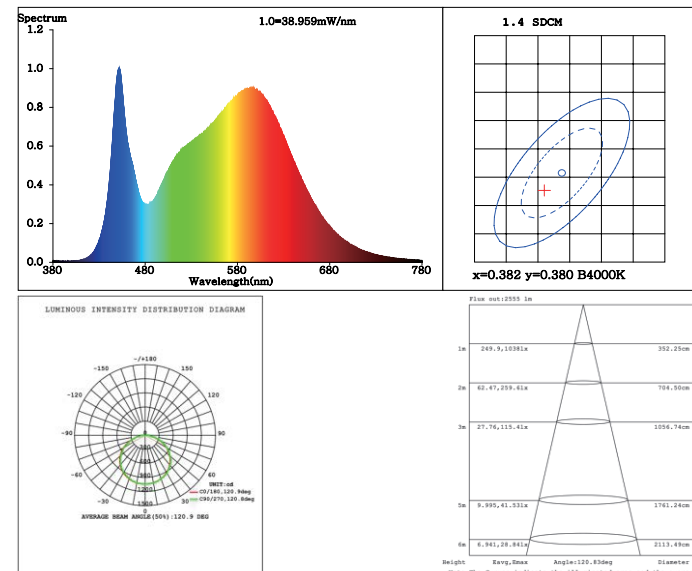

Dimension

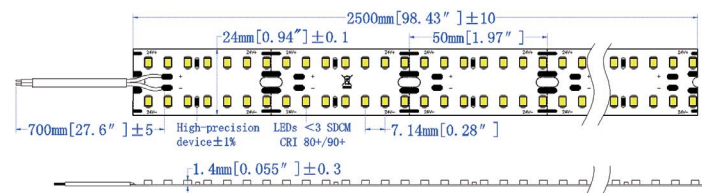

Parameters above allow 10% floating

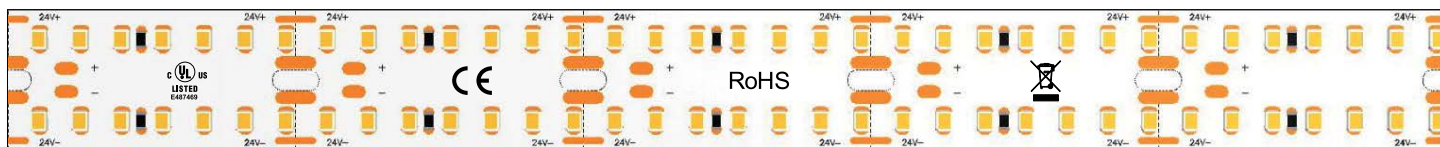**2700K**

25W/m (7.6W/ft)
2883lm/m (879lm/ft)

3000K

25W/m (7.6W/ft)
3179lm/m (969lm/ft)

4000K

25W/m (7.6W/ft)
3326lm/m (1014lm/ft)

6000K

25W/m (7.6W/ft)
3277lm/m (999lm/ft)

Optional Accessories**CC3P**


Cable extension connector;
T connector
Extension connector for one pin cable
Easy installation

**CC4P**

Cable extension connector
Extension connector for two pin cable
Easy installation

**CC6P**


Cable extension connector;
T connector
Extension connector for two pin cable
Easy installation

Triac Dimming


Wireless dimmer




Triac driver



UL junction box



LED flexible strip

0-10V Dimming


Dimmer




High power 3-in-1 dimming driver
(300W、320W、360W)



3-in-1 dimming driver (0-10V/RX/PWM)
(25W、65W、100W)



LED flexible strip

Non-Dimmable

Power Supply
110V



Non-Dimmable Dimmer



LED flexible strip