




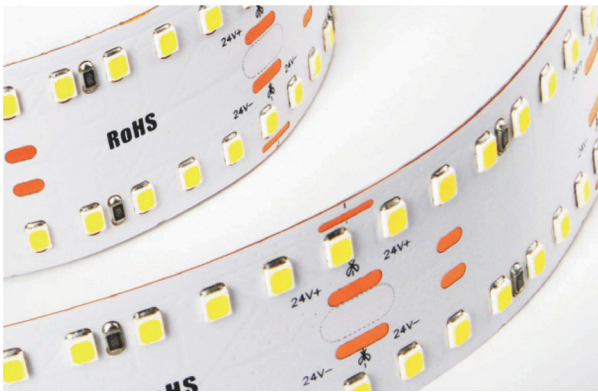

### Standard CCT




### Narrow Spectrum

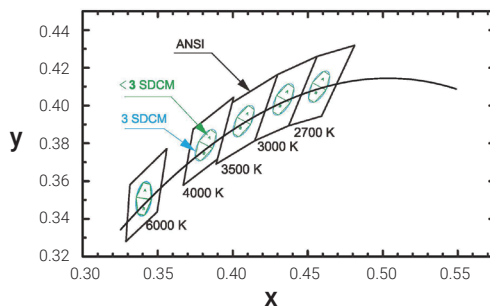

Impressive color consistency within 3 Step MacAdam in the center BIN on the Planck Locus over each individual LED, One Bin Only

### Various Waterproof Solution



IP33

No waterproof

Dry location

### BV Standard Product

Help to set up an energy conservation, flexible and multifunctional home lighting, the product with the features of low power, high brightness, high light efficiency, high CRI and high waterproof, various of connection accessories and dimming control systems are optional.


### Features

- Highlight SMD2835 + flexible FPC
- CRI80+/90+
- High brightness 3485~4035lm/m ( 1061~1230lm/ft)
- Light efficiency up to 135lm/W
- Precise cutting 50mm/unit ( 0.164ft/unit )
- Waterproof: IP33
- Working time≥50000H
- Suitable for various dimming controllers


### Parameter

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Input Voltage         | 24V DC                                        |
| Beam Angle            | 120°                                          |
| CCT                   | 2700K/3000K/4000K/6000K ( 2300K/3500K/5000K ) |
| CRI                   | 80+ / 90+                                     |
| Power                 | 30W/m (9.1W/ft)                               |
| Current               | 1.25A/m (0.381A/ft)                           |
| Brightness            | 3485-4035lm/m ( 1061-1230lm/ft)               |
| Length / Reel         | 2.5m (8.2ft)                                  |
| Cut Length            | 50mm/unit (0.164ft/unit)                      |
| IP Grade              | IP33                                          |
| Operating Temperature | -20°C~+45°C                                   |
| Storage Temperature   | 0°C~+60°C                                     |
| Environment Humidity  | 40-70% RH                                     |


### Test Report

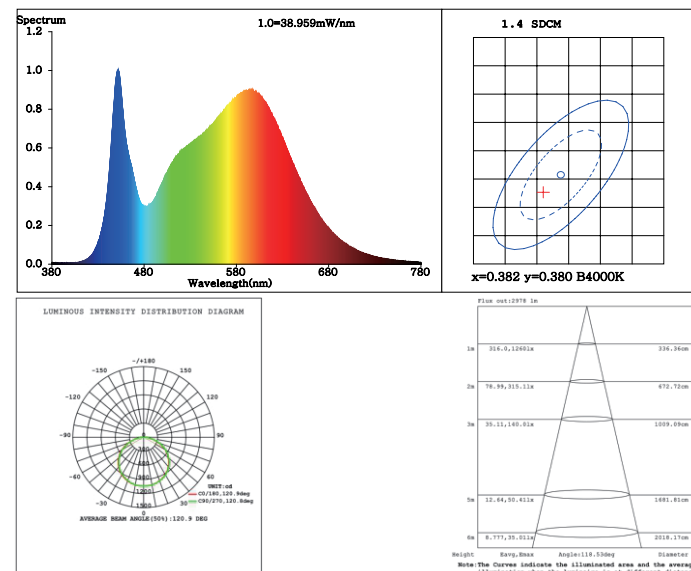

### Dimension

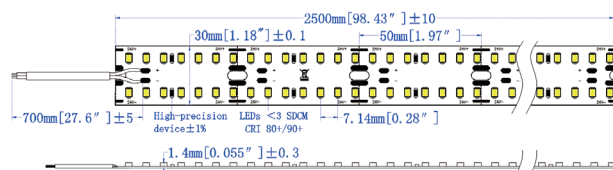

Parameters above allow 10% floating

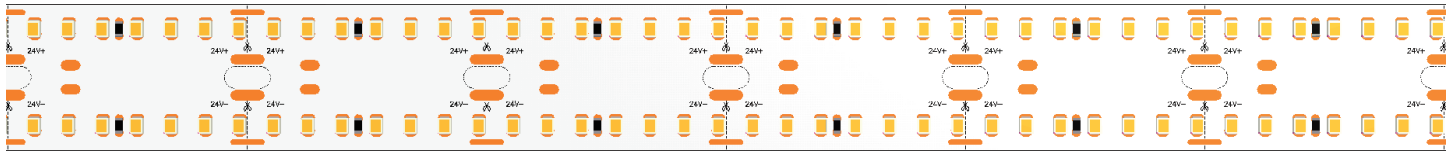**2700K**

30W/m (9.1W/ft)  
3489lm/m (1063lm/ft)

**3000K**

30W/m (9.1W/ft)  
3834lm/m (1169lm/ft)

**4000K**

30W/m (9.1W/ft)  
4031lm/m (1229lm/ft)

**6000K**

30W/m (9.1W/ft)  
3957lm/m (1206lm/ft)

**Optional Accessories****CC3P**


Cable extension connector; T connector  
Extension connector for one pin cable  
Easy installation  
Ten pcs connector in one bag

**CC4P**


Cable extension connector  
Extension connector for two pin cable  
Easy installation  
Ten pcs connector in one bag

**CC6P**

Cable extension connector; T connector  
Extension connector for two pin cable  
Easy installation  
Ten pcs connector in one bag

**Triac Dimming**


Wireless dimmer




UL junction box




LED flexible strip

**0-10V Dimming**

Dimmer

High power 3-in-1 dimming driver  
(300W、320W、360W)3-in-1 dimming driver (0-10V/RX/PWM)  
(25W、65W、100W)

LED flexible strip

**Non-Dimmable**Power Supply  
110V

Non-Dimmable Dimmer



LED flexible strip