



LW001			
Model	CCT	Length	Wire Length
	2700K	5m	WL12IN : 12in
	3000K	Customized	Customized
	3500K		
	4000K		



Color	Power	Brightness	Project
2700K	4.39W/ft	458 LM/ft	
3000K	4.39W/ft	508LM/ft	Qty
3500K	4.39W/ft	506LM/ft	Date
4000K	4.39W/ft	527LM/f	Client

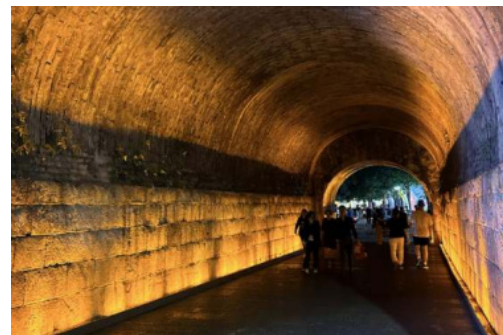

Standard CCT



2700K 3000K 3500K 4000K

Waterproof Solution




IP67
Silicone Extrusion

Wet location
Short time under water

Style	Top-Bend (White)
Dimension	W12 x H8mm (W0.47 x H0.31in)
Input Voltage	24VDC
Beam Angle	30°
CRI	90+
Power	14.4W/m (4.39W/ft)
Max. Length (No Voltage drop)	5m (16.4ft)
Length/Reel	5m (16.4ft)
Cut Length	125mm (4.92in)
Minimum bending diameter	100mm (3.94in)
Minimum twist degree	Do not twist
IP Grade	IP67
Operating Temperature	-20°C~45°C
Lifespan	30,000h, 3 year warranty
LED CCT & Wavelength	2700K; 3000K; 3500K; 4000K
Dimming Method	PWM (dimnable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS, REACH, WEEE, Class III



DIMENSION

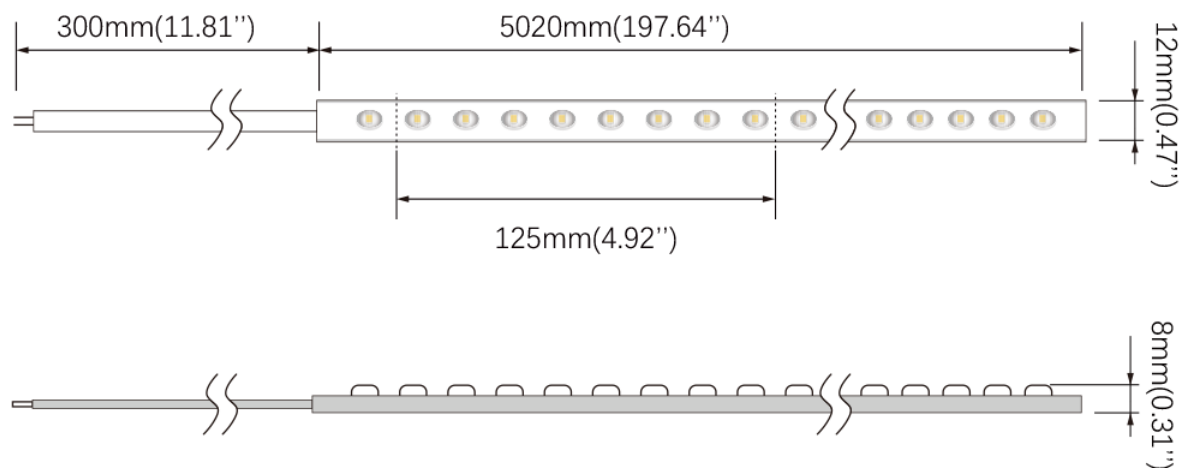

ACCESSORIES



LW001-AC

Aluminum Clips






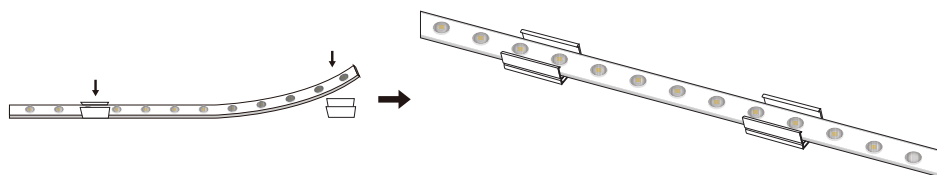



LW001-AP


Aluminum Profile

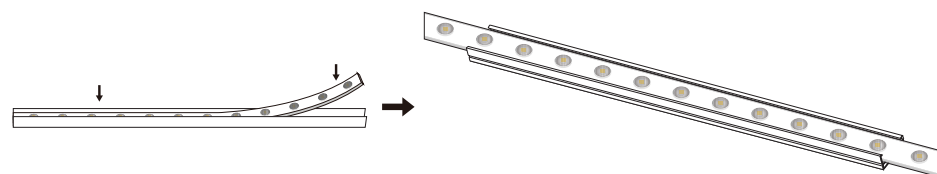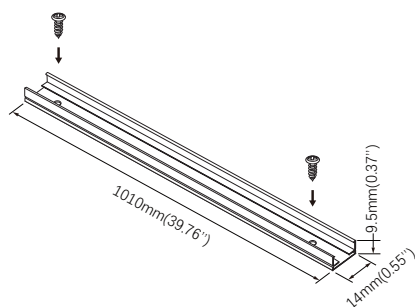

INSTALLATION GUIDE

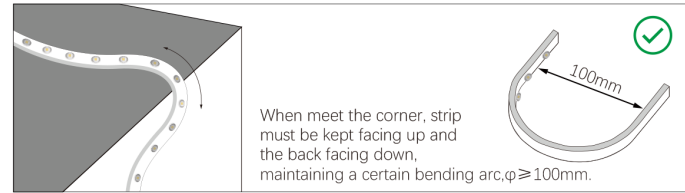

LUMINESCENCE PARAMETERS

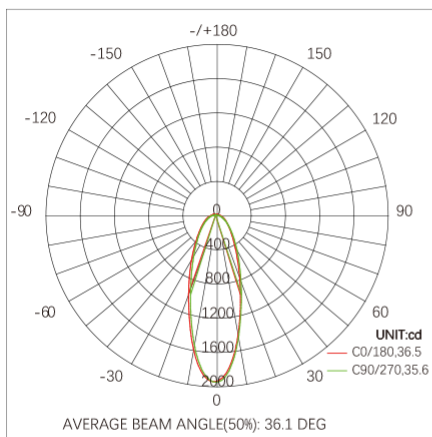

Remark: Output data is from test result of 4000K wall wash ;
Tolerance +10%.

Flux out: 419.8 lm

Height	Eavg, Emax	Angle: 35.66deg	Diameter
1m	1266,1968 lx		64.33 cm
2m	316,492.0 lx		128.66 cm
3m	140,6218.7 lx		192.98 cm
4m	79,11,123.0 lx		257.31 cm
5m	50,63,78.72 lx		321.64 cm
6m	35,16,54.67 lx		385.97 cm
7m	25,83,40.16 lx		450.30 cm
8m	19,78,30.75 lx		514.62 cm
9m	15,63,24.30 lx		578.95 cm
10m	12,66,19.68 lx		643.28 cm

WALL WASHING EFFECT

