


NE205	24	16	AA	67	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	16: 16mm	R G B W	67: IP67 (Wet)	80: 80+	5m 10m Customized



Color	Power	Brightness
R	5.5 W/ft	50lm/ft.
G	5.5 W/ft	50 lm/ft
B	5.5 W/ft	50 lm/ft
W	5.5 W/ft	50 lm/ft

Project	
Qty	
Date	
Client	

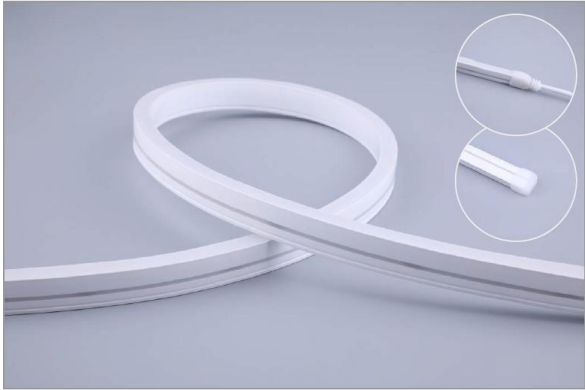

Standard CCT

2700K

3000K

3500K

4000K

5000K

6500K


Waterproof Solution



IP67
Silicone Extrusion

Wet location
Short time under water

Style	Side-Bend
Dimension	W10xH20mm [W0.39xH0.79in.]
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	5.5 W/ft
Max. Length (No Voltage drop)	5m(16.4ft)
Length/Reel	5m (16.4ft); 10m (32.8ft);
Cut Length	71.4mm [2.81in.]
Minimum bending diameter	120mm (4.72in)
Minimum twist degree	360°/1000mm (39.4in)
IP Grade	IP67
Operating Temperature	Tc≤65°C[149°F]
Lifespan	36,000h, 3 year warranty
LED CCT & Wavelength	SPI RGBW
Dimming Method	DMX, SPI
Certification	UL, TUV-CE, RoHS

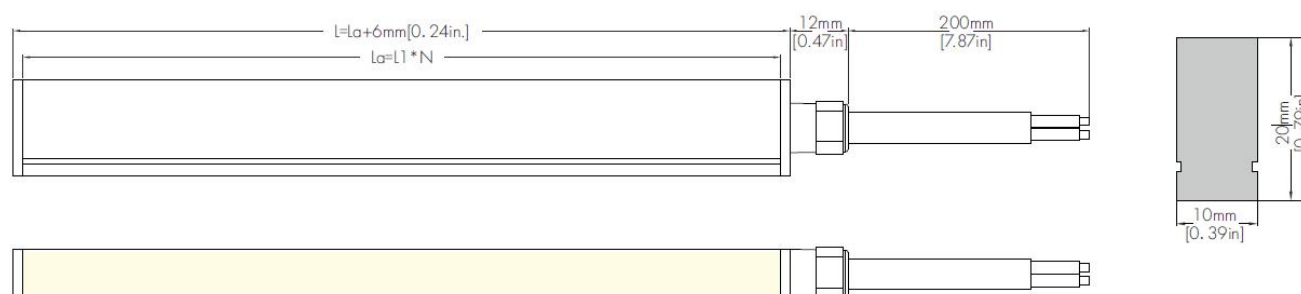DIMENSION**ACCESSORIES**

 NE205-BR Bottom mounting brackets for flexible LED neon strip light NE205	 NE205-RC Rigid Aluminum channel for flexible LED neon strip light NE205	 NE205-MC Top mounting clips for flexible LED neon strip light NE205.	 NE205-FC Flexible Aluminum channel for side bend LED neon strip light NE205.	 NE205-WK Power cable wiring kit for LED neon strip light NE205 [Rear/Side/Bottom] NE205-WK-RR  NE205-WK-SD  NE205-WK-BT 
--	--	---	--	--